

# QUADVOLT

## 4 CHANNEL VOLTAGE DATA LOGGER




### Features

- Real-time operation
- Programmable engineering units
- Low cost
- Reusable
- Compact
- User-friendly
- Programmable start time

### Applications

- Low level signal monitoring
- Medical and pharmaceutical
- Battery studies
- Power supply monitoring
- Process plants
- Environmental studies
- Research and development
- Replace costly strip chart recorders

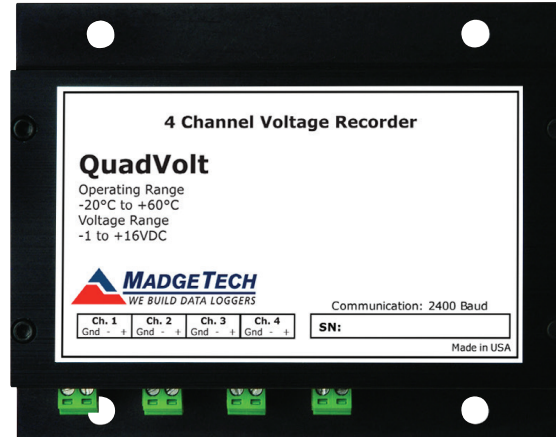


The Quadvolt is a four channel, battery powered, stand alone voltage recorder. This is an all-in-one compact, portable, easy to use device that will measure and record up to 32,767 measurements per channel. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and its small size allows it to fit almost anywhere. The QuadVolt makes data retrieval quick and easy. Simply plug it into an empty COM or USB port and our user-friendly software does the rest.

## MADGETECH DATA LOGGER SOFTWARE

### Key

- A** Graph View
- B** Tabular Data View
- C** Statistics
- D** Digital Calibration
- E** Copy to Excel®

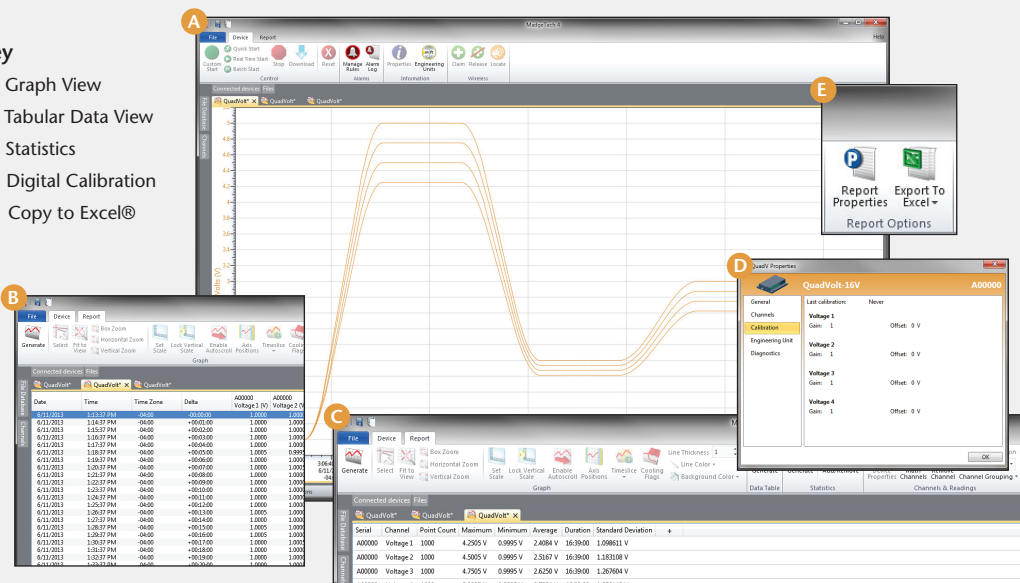

### Software Features:

- Multiple graph overlay
- Statistics
- Digital calibration
- Zoom in/ zoom out
- Lethality equations (F0, PU)
- Mean Kinetic Temperature
- Full time zone support
- Data annotation
- Min./Max./Average lines
- Data table view
- Automatic report generation
- Summary view
- Multilingual

# QUADVOLT SPECIFICATIONS\*

\*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

<b>Input Connection:</b>	4 removable screw terminals			
<b>Model:</b>	<b>2.5 V</b>	<b>15 V</b>	<b>30 V</b>	<b>100 mV</b>
<b>Voltage Range:</b>	-0.25 to +2.75	-1.0 to +16.0	-2.0 to +32.0	±150 mV
<b>Voltage Resolution:</b>	0.1 mV	0.5 mV	1.0 mV	5 µV
<b>Calibrated Accuracy:</b>	±0.01 (%FSR)	±0.10 (%FSR)	±0.10 (%FSR)	±0.01 %FSR
<b>Input Impedance:</b>	>1 kΩ*	>10 kΩ	>10 kΩ	>1 kΩ, >1 MΩ during acquisition
<b>Overload Protection:</b>	±5 V	±30 V	±48 V	±5.0 V for 10 seconds
<b>Temperature Coefficient:</b>	< 25 ppm/°C	< 250 ppm/°C	< 250 ppm/°C	<25 ppm/°C; <10 ppm/°C typical
<b>Analog Conversion Time:</b>	133 ms			
<b>Frequency Rejection:</b>	60 Hz			
<b>Specified Accuracy Range:</b>	Nominal range @ 25 °C			
<b>Engineering Units:</b>	User may define units up to 10 characters in length. This value is stored within the device.			
<b>Scale Factor:</b>	User may program any desired scaling factor from ±1.000E-31 to ±9.999E+31. The scaling factor is stored within the device.			
<b>Start Modes:</b>	Software programmable immediate start or delay start up to six months in advance			
*Input impedance is greater than 1 MΩ during acquisition for the QUADVOLT-2.5				

<b>Memory:</b>	32,767 readings per channel; 131,068 total readings
<b>Reading Rate:</b>	1 reading every second up to 1 reading every 12 hours
<b>Real Time Recording:</b>	May be used with PC to monitor and record data in real time
<b>Calibration:</b>	Digital calibration through software
<b>Calibration Date:</b>	Automatically recorded within device
<b>Battery Type:</b>	9V lithium or alkaline battery included; <b>user replaceable</b>
<b>Battery Life:</b>	1 year typical
<b>Data Format:</b>	Date and time stamped V, mV, µV, engineering units specified through software
<b>Time Accuracy:</b>	±1 minute/month (at 20 °C, RS232 cable not in use)
<b>Computer Interface:</b>	PC serial or USB (interface cable required); 2,400 baud
<b>Software:</b>	XP SP3/Vista/Windows 7/Windows 8
<b>Operating Environment:</b>	-20 °C to +60 °C, 0 %RH to 95 %RH non-condensing
<b>Dimensions:</b>	3.5 in x 4.4 in x 1.0 in (89 mm x 111 mm x 26 mm)
<b>Weight:</b>	13 oz (370 g)
<b>Materials:</b>	Black anodized aluminum

**BATTERY WARNING:** DISCARD USED BATTERY PROMPTLY. KEEP OUT OF REACH OF CHILDREN. DO NOT DISPOSE OF IN FIRE, RECHARGE, PUT IN BACKWARDS, DISASSEMBLE, OR MIX WITH OTHER BATTERY TYPES. MAY EXPLODE, FLAME OR LEAK AND CAUSE PERSONAL INJURY.

## ORDERING INFORMATION

MODEL	DESCRIPTION
QUADVOLT-100mV	±100mV 4 Channel Voltage Recorder
QUADVOLT-2.5V	±2.5V 4 Channel Voltage Recorder
QUADVOLT-15V	±15V 4 Channel Voltage Recorder
QUADVOLT-30V	±30V 4 Channel Voltage Recorder
IFC110	Software, manual and RS232 interface cable
IFC200	Software, manual and USB interface cable
Calibration Certificate	Calibration Certificate available for data logger
U9VL-J	Replacement battery for QuadVolt

ASK ABOUT  
OUR OTHER  
DATA  
LOGGERS

Temperature

Humidity

Pressure

pH

Level

Shock

LCD Display

Pulse/Event/State

Current

Voltage

Wireless

Intrinsically Safe

Spectral Vibration

Motion

For Quantity Discounts call 603-456-2011 or email [sales@madgetech.com](mailto:sales@madgetech.com)